




FEATURES:

- Internal quality control of wrap wire specifications.
- Pre-packed screen cartridges are available in standard service 316LSS or CRA alloy as required.
- Excellent choice for marginal reservoirs requiring economical sand control options.
- The dual jacket design and packing process insures a void-free, concentric and uniform pack annulus.

BENEFITS:

- Provides a measure of protection against erosional forces and voids during sand placement procedures.
- A cost effective alternative to premium diffusion bonded screens.
- Suitable for stand alone applications as well as High Rate Water Packs (HRWP) and Frac Packs (FP) in cased or open hole completions.
- The spherical Econo-Prop pack material provides excellent compaction properties with high permeability for maximum flow characteristics.
- Extremely damage resistant.

SIZE	BASE PIPE						Inlet Area					
	A	B	C		D	F	G		H	I		
	OD	Coupling OD	Weight	ID	Max. Perforation - Flow Area		Product		Base Pipe Flow	.006" Slot	.008" Slot	.012" Slot
Unit	in	in	lb/ft	in	Size (in)	in ² /ft	lb/ft	OD (in)	in ²	(sq. in/ft)		
2-3/8"	2.375	2.875	4.6	1.995	0.375	5.299	14.00	3.15	3.126	7.422	9.694	13.971
2-7/8"	2.875	3.500	6.4	2.441	0.375	5.299	16.00	3.60	4.678	8.482	11.079	15.967
3-1/2"	3.500	4.250	9.2	2.867	0.375	6.624	20.00	4.25	6.456	10.014	13.079	18.850
4"	4.000	4.750	11.6	3.428	0.375	7.949	22.00	4.75	9.229	11.192	14.618	21.067
4-1/2"	4.500	5.000	13.5	3.920	0.375	9.274	25.00	5.25	12.069	12.370	16.157	23.285
5"	5.000	5.563	15.0	4.408	0.375	9.274	28.00	5.75	15.261	13.548	17.696	25.502
5-1/2"	5.560	6.050	17.0	4.892	0.375	10.598	32.00	6.25	18.796	14.726	19.234	27.720
6-5/8"	6.625	7.390	24.0	5.921	0.375	11.923	42.00	7.40	27.535	17.436	22.773	32.820
7"	7.000	7.657	23.0	6.366	0.375	13.248	50.00	7.75	31.829	18.261	23.851	34.373

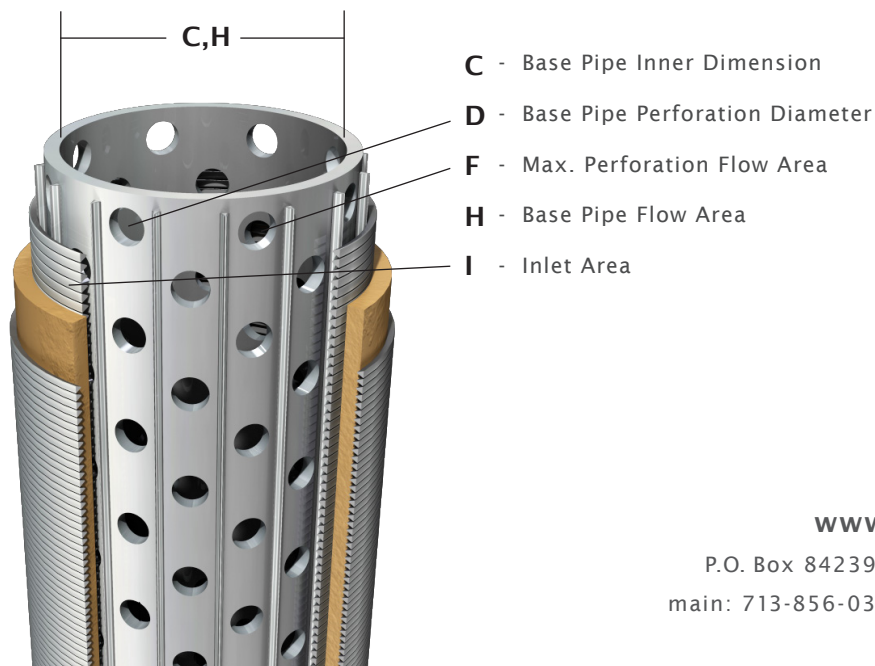

www.deltascreens.com

P.O. Box 842397 Houston, Texas 77284
 main: 713-856-0300 fax: 713-856-0303